

NT2016SC


Temperature Compensated Crystal Oscillator(TCXO)
with two outputs of same frequency and E/D function

Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

Features

- Supports low power supply voltage. (Supports DC +1.7V to +3.3V. Standard specification : +1.8V)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.8 mm, 0.0022 cm³, and 0.008 g, respectively.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- With Enable / Disable function (This function can be used for both output1 and 2).
- It is possible to choose the AFC function instead of the Enable/Disable function for output 2.

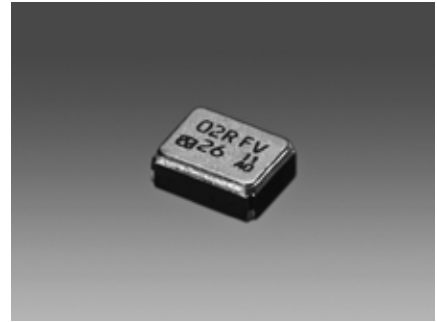

Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

Specifications

Item	Model	NT2016SC		
Nominal Frequency Range (MHz)		10 to 52		
Standard Frequency (MHz)	26	38.4	52	
Supply Voltage [V _{CC}] (V)	+1.8			
Load Impedance	10 kΩ//10 pF			
Current Consumption (mA) (Two outputs)	Max. 2.0	Max. 2.2	Max. 2.4	
Output Voltage	Min. 0.8 V(p-p) (DC Coupling *1)			
Frequency/Temperature Characteristics	Max. ±2.0×10 ⁻⁶ (Max. ±0.5×10 ⁻⁶ available)			
Operating Temperature Range (°C)	-30 to +85			
Storage Temperature Range (°C)	-40 to +85			
Frequency/Voltage Coefficient	Max. ±0.1×10 ⁻⁶ /+1.8 V±5 %			
Frequency/Load Coefficient	Max. ±0.1×10 ⁻⁶ /(10 kΩ//10 pF) ±10 %			
Long-term Frequency Stability	Max. ±1.0×10 ⁻⁶ /year			
Specification Number	NSA3502B	NSA3502C	NSA3502D	

* Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

Dimensions

