

Crystal Clock Oscillator

NZ2016SH

Standard Type (32.768kHz)

Application

For Smartphone and Tablet computer etc

Features

- Supports a wide temperature range from -40 to +125°C.
- Ultra compact and light. Dimensions : 2.0 x 1.6 x 0.7 mm, weight : 0.01 g.
- Quick oscillation start up time(Typ. 1ms) is available compared to our Tuning Fork Crystal.
- Conforms to AEC-Q200.



Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863


Absolute maximum rating
Supply Voltage (V_{CC}) -0.3 to +7.0 V
Storage Temperature Range -55 to +125 °C

End of Life
Dec-2021


Specifications

Item	Model	NZ2016SH		
Output Specification		CMOS		
Nominal Frequency	(kHz)	32.768		
Overall Frequency Tolerance	(×10 ⁻⁶)	±100	±50	±30
Operating Temperature Range	(°C)	-40 to +125	-40 to +105	-40 to +85
Supply Voltage (V _{CC})	(V)	+1.8 to +3.3		
Current Consumption Max.	During Operation	+25 °C	220 to 260	
	During Standby	+25 °C	20	
V _{OL} Max. / V _{OH} Min.	(V)	0.1 V _{CC} / 0.9 V _{CC}		
Tr Max. / Tf Max.	(ns)	200 / 200 (at 0.1V _{CC} to 0.9V _{CC})		
Symmetry Min. to Max.	(%)	45 to 55 (at 0.5V _{CC})		
Load (C _L) Max.	(pF)	15		
Start-up Time Max.	(ms)	4 (Typ. 1ms)		
Frequency Aging Max.	(×10 ⁻⁶)	±5 (+25°C, First year)		
Standby function		Available (Three-state)		

Dimensions

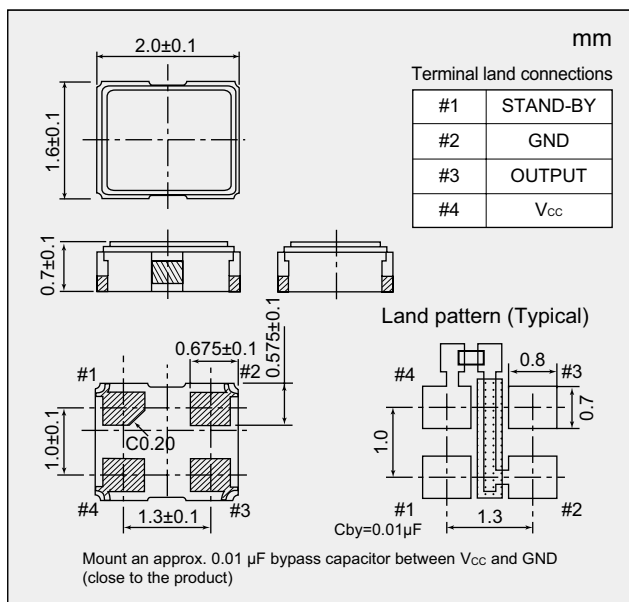

Output Waveform <CMOS>

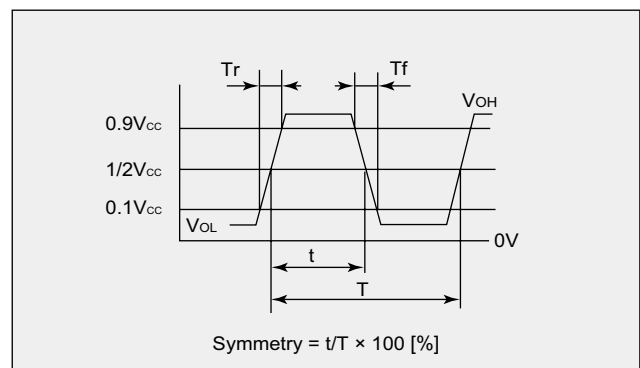

Standby Function

#1 Input	#3 Output
Level H ($0.7 V_{CC} \leq V_{IH} \leq V_{CC}$) or OPEN is selected.	Oscillation output ON
Level L ($V_{IL} \leq 0.3 V_{CC}$) is selected.	High impedance

Crystal Clock Oscillator



NZ2016SH

Standard Type (32.768kHz)

■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±100 × 10 ⁻⁶	-40 to +125	NSC5026A	NSC5026B	NSC5026C	NSC5026D
±50 × 10 ⁻⁶	-40 to +105	NSC5028A	NSC5028B	NSC5028C	NSC5028D
±30 × 10 ⁻⁶	-40 to +85	NSC5031A	NSC5031B	NSC5031C	NSC5031D

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

End of Life
Dec-2021