

Crystal Clock Oscillator

NZ2520SH

Standard Type (32.768kHz)

Application

For Smartphone and Tablet computer etc.

Features

- Supports a wide temperature range from -40 to +125°C.
- Compact and light. Dimensions : 2.5 x 2.0 x 0.9 mm, weight : 0.02 g.
- Quick oscillation start up time(Typ. 1ms) is available compared to our Tuning Fork Crystal.
- Conforms to AEC-Q200.



Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863


Absolute maximum rating
Supply Voltage (V_{CC}) -0.3 to +7.0 V
Storage Temperature Range -55 to +125 °C

End of Life
Dec-2021


Specifications

Item	Model	NZ2520SH		
Output Specification		CMOS		
Nominal Frequency	(kHz)	32.768		
Overall Frequency Tolerance	($\times 10^{-6}$)	± 100	± 50	± 30
Operating Temperature Range	(°C)	-40 to +125	-40 to +105	-40 to +85
Supply Voltage (V _{CC})	(V)	1.8 to +3.3		
Current Consumption Max.	During Operation	+25°C	μ A	
	During Standby	+25°C	μ A	
			160 to 180	
			20	
V _{OL} Max. / V _{OH} Min.	(V)	0.1 V _{CC} / 0.9 V _{CC}		
Tr Max. / Tf Max.	(ns)	200 / 200 (at 0.1V _{CC} to 0.9V _{CC})		
Symmetry Min. to Max.	(%)	45 to 55 (at 0.5V _{CC})		
Load (C _L) Max.	(pF)	15		
Start-up Time Max.	(ms)	4 (Typ. 1ms)		
Frequency Aging Max.	($\times 10^{-6}$)	± 5 (+25°C, First year)		
Standby function		Available (Three-state)		

Dimensions

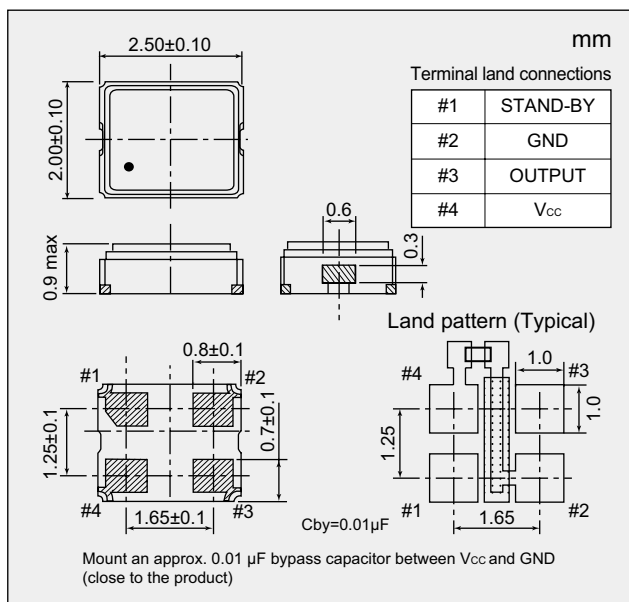

Output Waveform <CMOS>

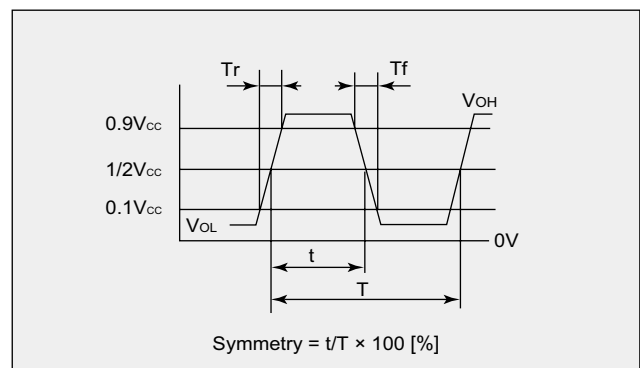

Standby Function

#1 Input	#3 Output
Level H ($0.7 V_{CC} \leq V_{IH} \leq V_{CC}$) or OPEN is selected.	Oscillation output ON
Level L ($V_{IL} \leq 0.3 V_{CC}$) is selected.	High impedance

Crystal Clock Oscillator



NZ2520SH

Standard Type (32.768kHz)

■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±100 × 10 ⁻⁶	-40 to +125	NSC5013A	NSC5013B	NSC5013C	NSC5013D
±50 × 10 ⁻⁶	-40 to +105	NSC5015A	NSC5015B	NSC5015C	NSC5015D
±30 × 10 ⁻⁶	-40 to +85	NSC5018A	NSC5018B	NSC5018C	NSC5018D

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.

End of Life
Dec-2021