

NP3225SAB

Simple Packaged Crystal Oscillator (SPXO)

Main Application


For 5G compatible device, Base station, Optical network terminal, SONET/SDH equipment, Low-end router and Ethernet equipment

Features

- Differential Output SPXO
- Compact dimension : 3.2 × 2.5 × 0.9 mm
- Supply Voltage : +2.5V or +3.3V
- Output Specification : LVPECL
- Excellent low phase jitter (Typ. 42fs @156.25MHz)

Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

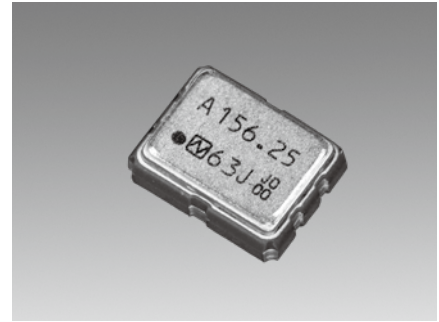


Absolute maximum rating
Supply Voltage (V_{CC}) -0.3 to +4.0 V
Storage Temperature Range -55 to +125 °C

Specifications

Item	Model	NP3225SAB
Output Specification		LVPECL
Nominal Frequency Range (MHz)		100 to 170
Overall Frequency Tolerance *1		Max. ±50 × 10 ⁻⁶
Operating Temperature Range (°C)		-40 to +85
Supply Voltage [V _{CC}] (V)		+2.5 ± 5 % +3.3 ± 10 %
Current Consumption	Enable (mA) +25°C	Max. 60 (STAND-BY=V _{CC} or OPEN, R _L =50Ω)
	Stand-by (µA) +25°C	Max. 30 (STAND-BY=GND)
Output Voltage (V)		V _{OL} : Max. V _{CC} -1.5V V _{OH} : Min. V _{CC} -1.1V
Rise Time / Fall Time (ns)		Max. 1 (20 to 80% Waveform)
Symmetry (%)		45 to 55 (at 50% Waveform)
Output Load (Ω)		50 (Terminated to V _{CC} -2.0V)
Start-up Time (ms)		Max. 10
Phase Jitter (fs)	+3.3V, +25°C	Typ.42 (156.25MHz) (Offset Frequency : 12kHz to 20MHz)
Specification Number		NSC5186A NSC5186B

*1 : The frequency stability includes initial frequency tolerance, temperature variation, and supply variation.


Dimensions

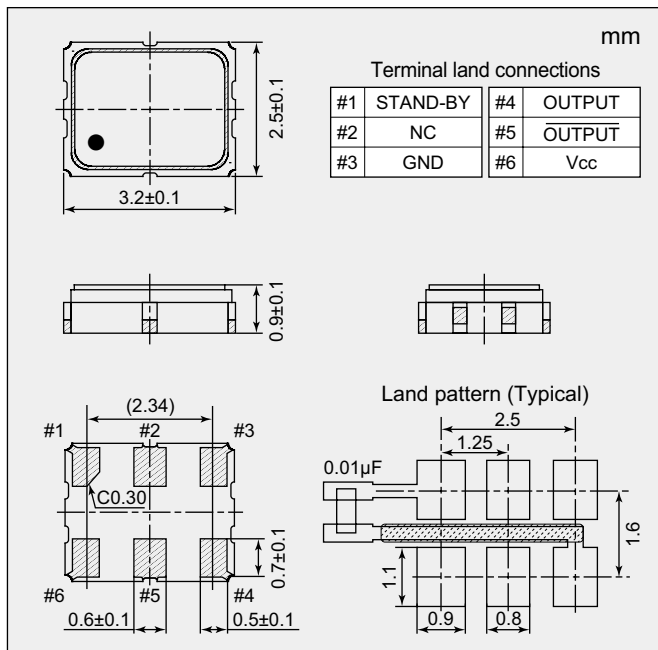


Standby Function Table (Three-state)

#1 Input	#4 and #5 output
Level H (V _{IH} ≥ 0.7 V _{CC}) or OPEN	Oscillation output ON
Level L (V _{IL} ≤ 0.3 V _{CC})	High impedance

Output waveform

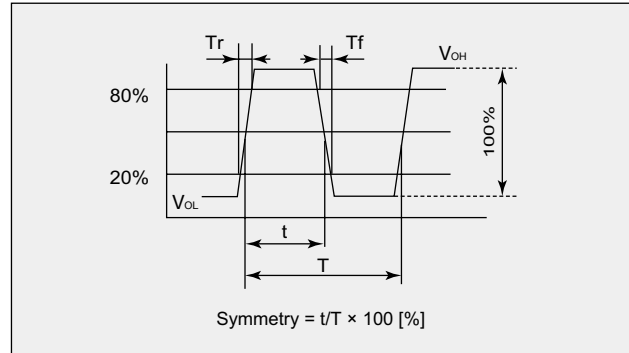

Phase Noise Characteristics

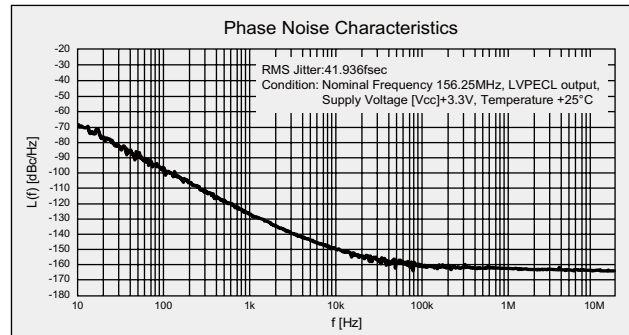

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.