

WFC30B0924FF


For Short-range Wireless

■ Features

- SAW filter for specified low power radio.
- Ultra compact and light. (1.4×1.1×0.5mm)

Pb Free


RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

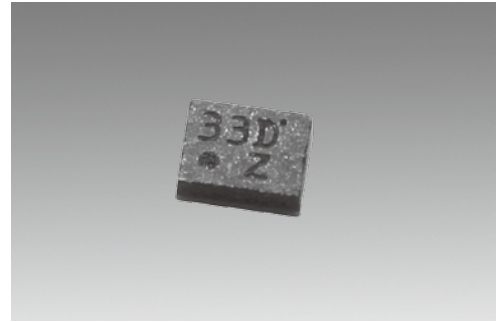

■ Specifications

Model	WFC30B0924FF		
Item	min.	typ.	max.
Nominal Frequency (MHz)	-	924	-
Maximum Insertion Attenuation (dB) (920 to 928MHz)	-	2.3	3.2
Pass Band Ripple (dB) (920 to 928MHz)	-	0.3	1.0
Guaranteed Attenuation (dB)	40 to 874MHz	40	54
	874 to 890MHz	35	47
	890 to 905MHz	23	34
	945 to 960MHz	23	29
	960 to 995MHz	23	31
	995 to 1500MHz	40	52
1500 to 3000MHz	20	40	-
Operating Temperature Range (°C)	-40 to +85		
Terminating Impedance (Ω)	50		

■ Dimensions

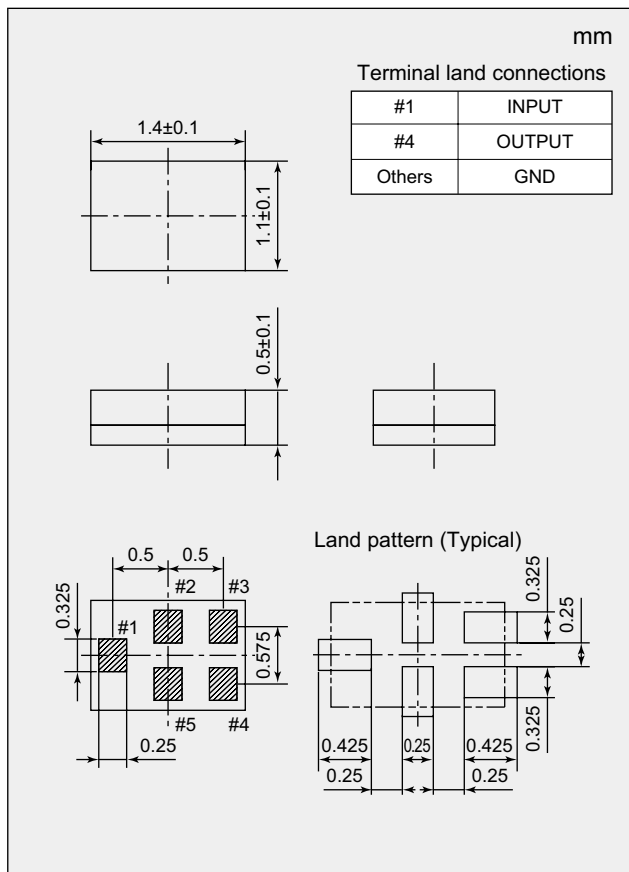

■ Characteristics

